

Unsupervised Classification

Classification = simplification, mapping

The promise of satellite imagery: (1970s-80s)

A. Rapid map updating

B. Automated mapping of 'Land Cover' / Land use

- no manual digitizing ... use of multispectral band data

*VRI (BC -vegetation
resource inventory)
example of manual
digitising*



Manual interpretation e.g. air photos

Features are classified = simplified
– a form of generalisation



Human interpretation / classification relies on attributes such as:
Shape, pattern, texture, shadows, size, association, tone, colour

Algorithms mostly use Digital Number (DN) = ~digital version of tone/colour²

Remote Sensing Classification

- Automated grouping of similar pixels using multispectral DNs
- Software developed following 1972 (Landsat 1)
- Digital alternative to manual mapping of Land Cover



Classified layer in the Virginia Urban Tree Canopy Mapper - <http://www.utcmapper.frec.vt.edu>

Land Use v Land Cover (LULC) e.g. Parks

Sugarbowl-Grizzly Den



Bowron Lakes



Mt. Egmont / Taranaki, NZ




Using just one band to classify ?

One image band could only be treated as an air photo (interpretation)


Digital Numbers from one band alone are rarely enough - features are not unique





[Band 3](#)

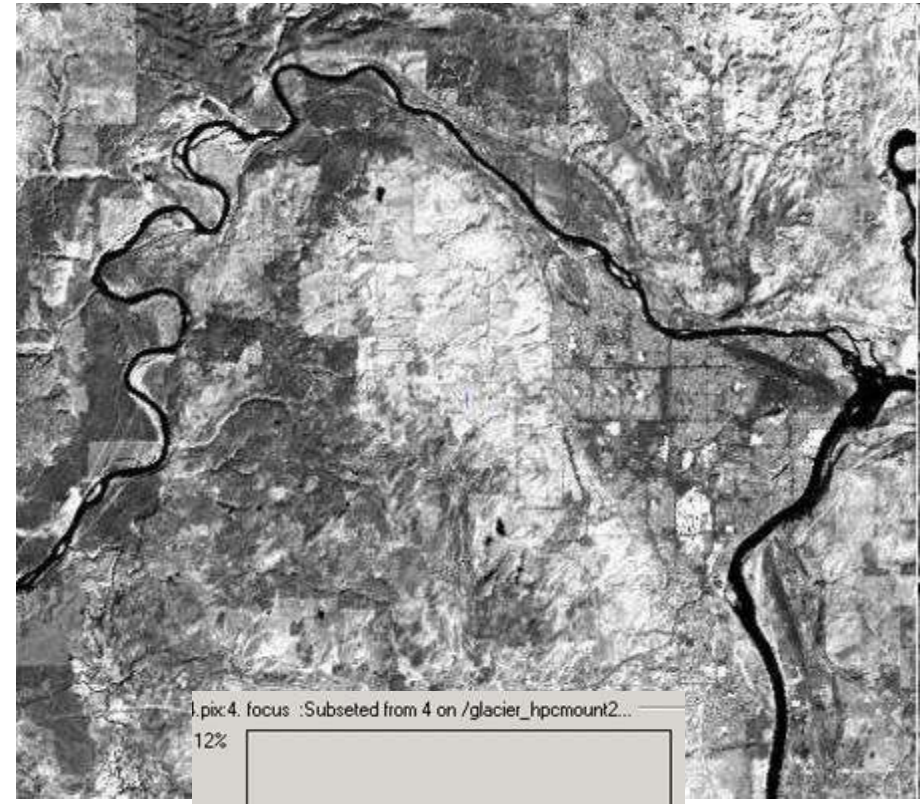

[Band 4](#)

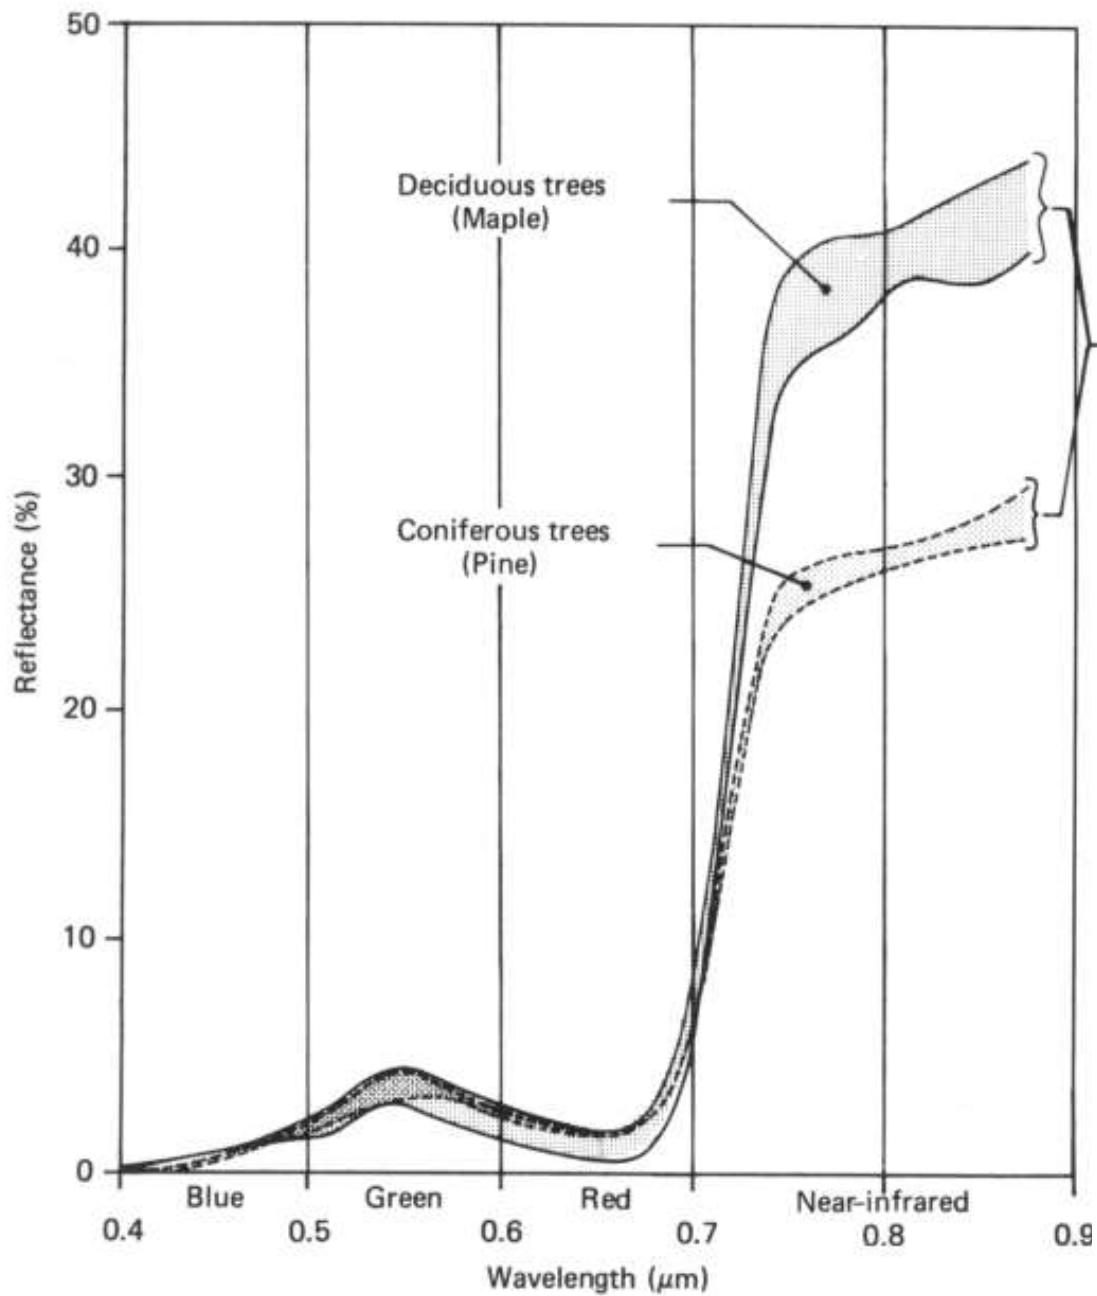

(Note range of spectral values)

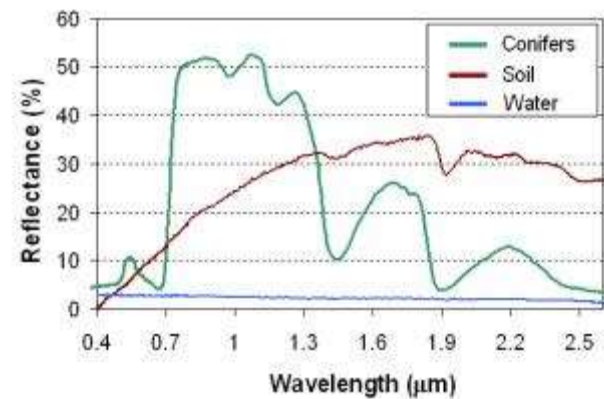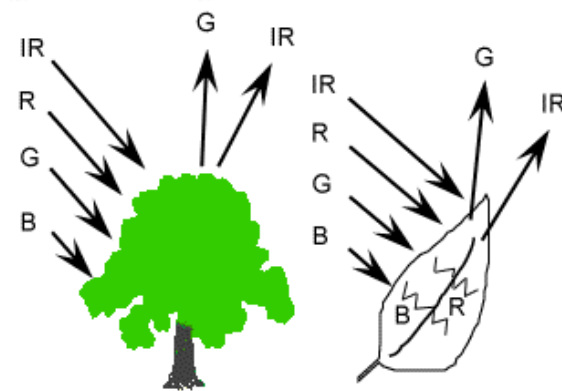

Band / channel selection


TM: 1-7; OLI/TIRS 1-11

Thematic Mapper

Operational Land Imager



Bands 1, 2, 3

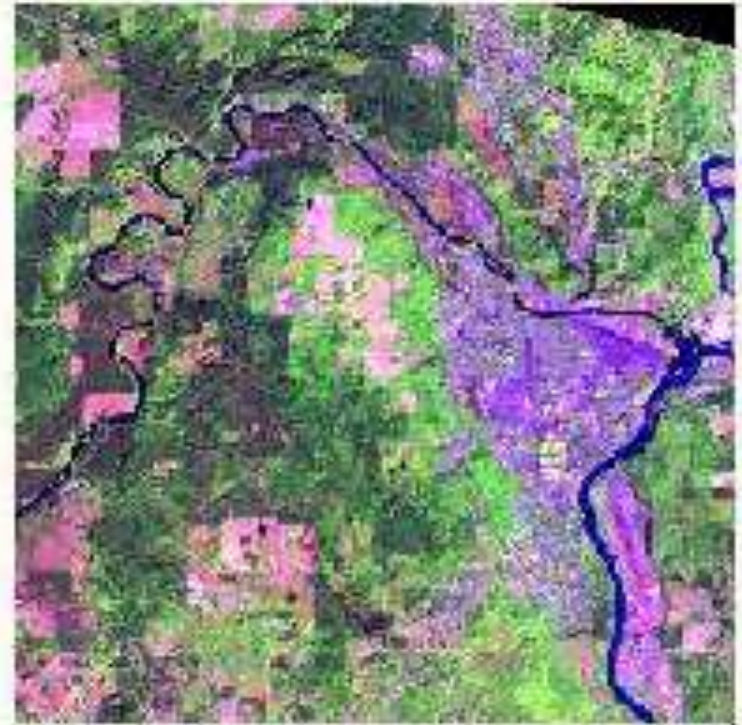


Bands 5, 4, 3

Landsat TM has 7 bands: You would NOT select 3 visible bands to classify

The visible bands are similar - and thus the composite is low in contrast


The role of multispectral sensing in classification

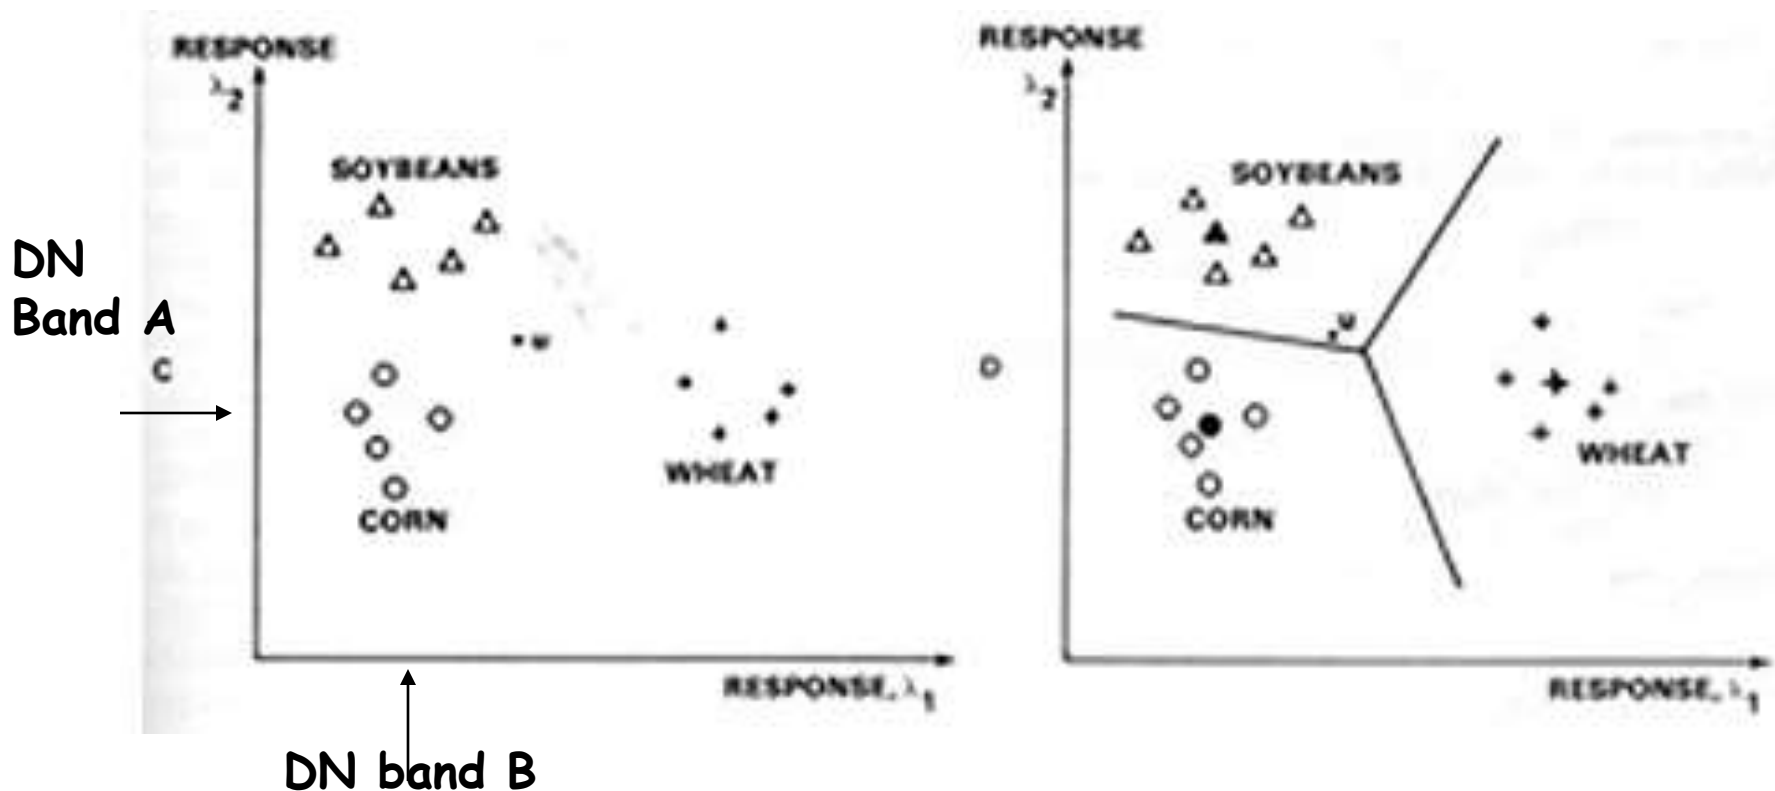

DNs in Band A are similar for Corn and Wheat
DNs in Band B are similar for Corn and Soybeans

... but if we use both Bands A and B, then all 3 differ



... Algorithms are '**per pixel**' classifiers

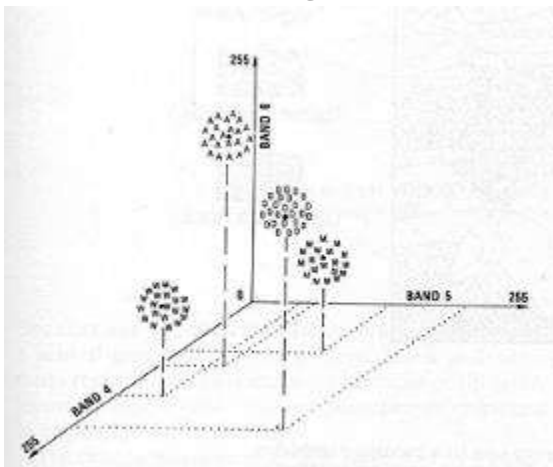

band correlation coefficients and scatterplots

Example: PG Landsat data (r values between bands)

	TM1	2	3	4	5	6
TM1						
TM2	.97					
TM3	.96	.96				
TM4	.07	.16	.11			
TM5	.66	.72	.76	.46		
TM6	.77	.77	.81	.14	.80	
TM7	.83	.86	.90	.25	.93	.86

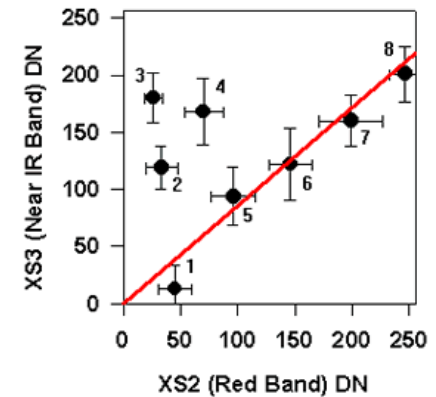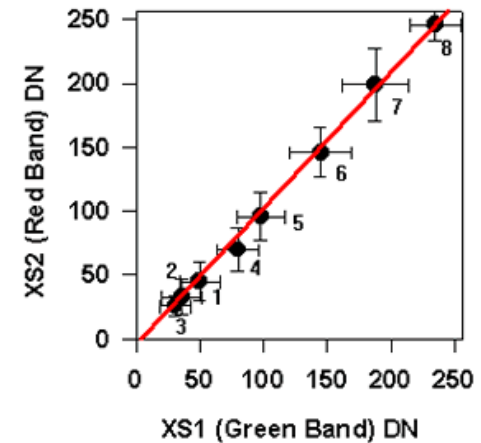

The Visible bands are highly correlated (similar) .. ($r = .96$ to $.97$)




.. so also are bands 5 and 7 ($r = .93$)

band 4 (near-IR) is not very correlated with Visible or MIR (nor thermal)

Note: these values will vary for different environments e.g. urban, desert, forested

Unsupervised classification

Example of Visible bands only (2,3) versus Visible and Near-IR

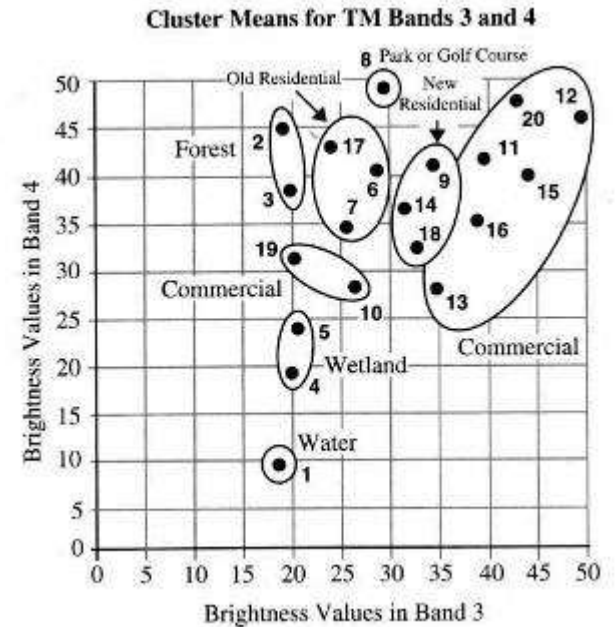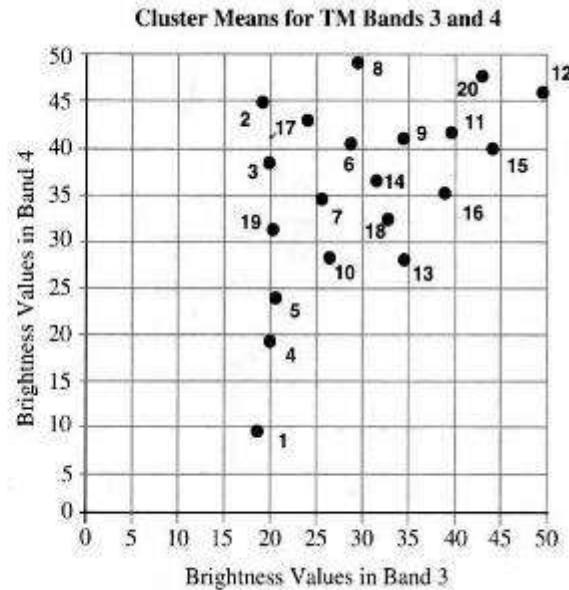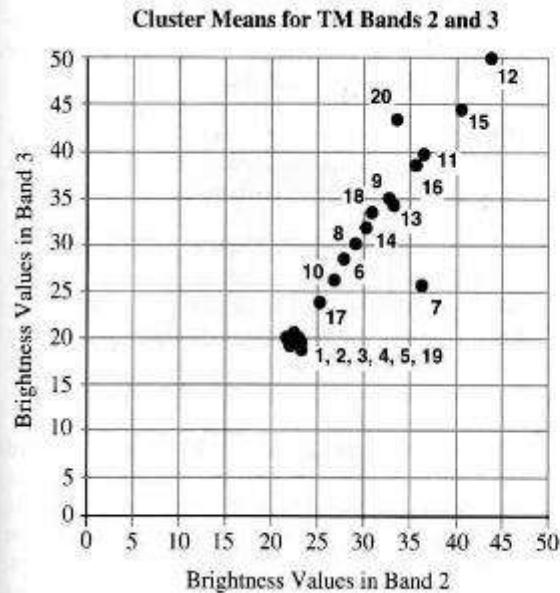

Two bands are shown for simplicity
Input bands selected - minimum 3 or 4 bands;

Classification: Band / Channel Selection

How to choose which ones to use:

1. Low correlation e.g. TM 3-4-5 or 2-4-7 (Visible-NIR-MIR)
2. Past experience, visual examination, logical thinking
3. Channels that separate the features we want to identify
(based on DNs / spectral curves / histograms)
4. Or simply just use them all ... (except the thermal band)

Unsupervised classification


Characteristics

- user needs little 'a priori' knowledge of area
- The software clusters pixels by natural DN groupings (based on similarity and contrast - 'natural breaks')

Steps

- determine how many classes / clusters
- determine which input bands / channels to use
- run classifier : K-means or Isodata
- Rerun with more clusters if needed
- assign names to classes (merge classes if needed)

Unsupervised result - 10 classes (clusters)

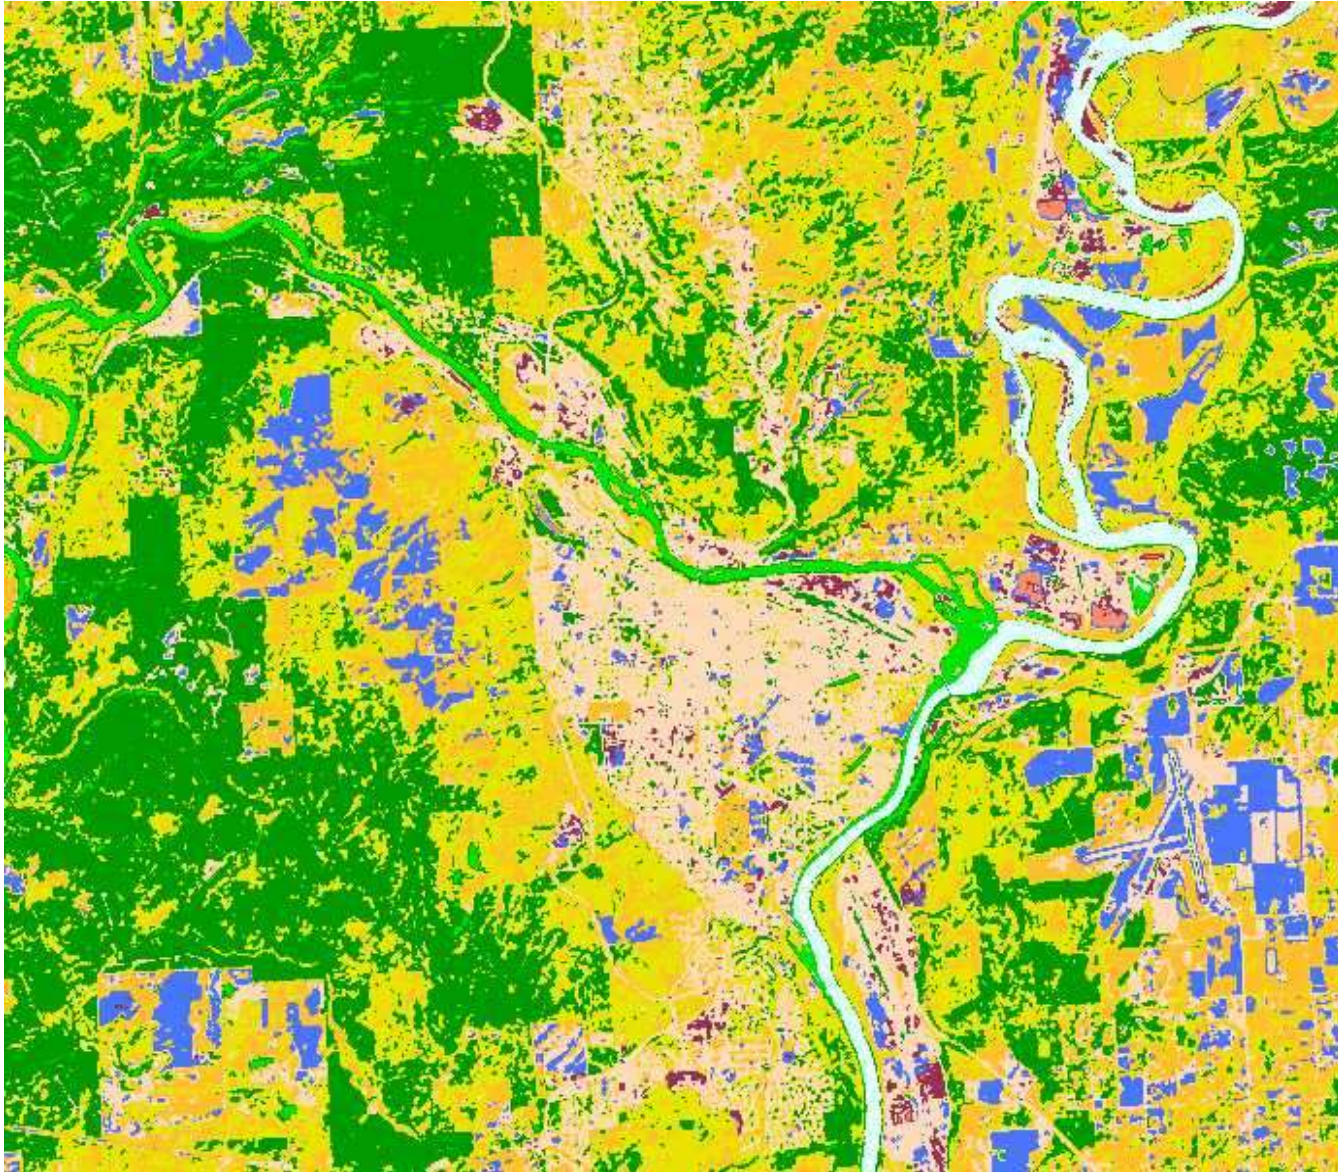

This is a new channel
in your .pix file
- It's not a band





Colours are random



**Note: urban
classification is
NOT easy!**

Unsupervised - how it works YIKES! (do we need to know this?)

- ❑ Algorithm starts with statistical seed points
- ❑ Assigns each pixel to the closest seed
- ❑ Calculates group mean in 'n-dimensional' space
- ❑ Re-assigns pixels to the closest group mean
- ❑ Re-calculates group mean
- ❑ Iterates (10?) until relatively little change and fixes groupings

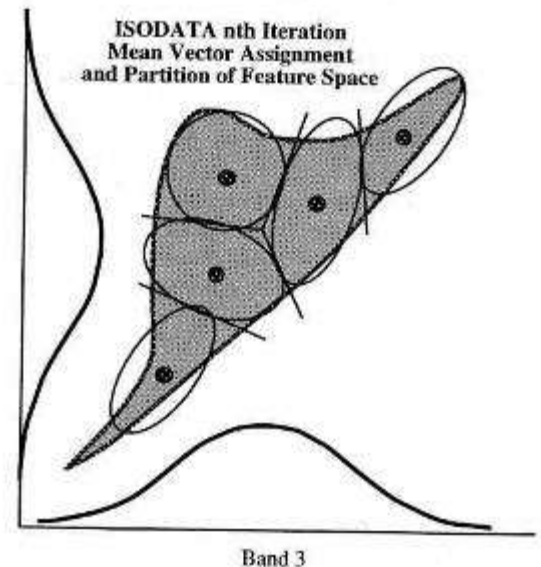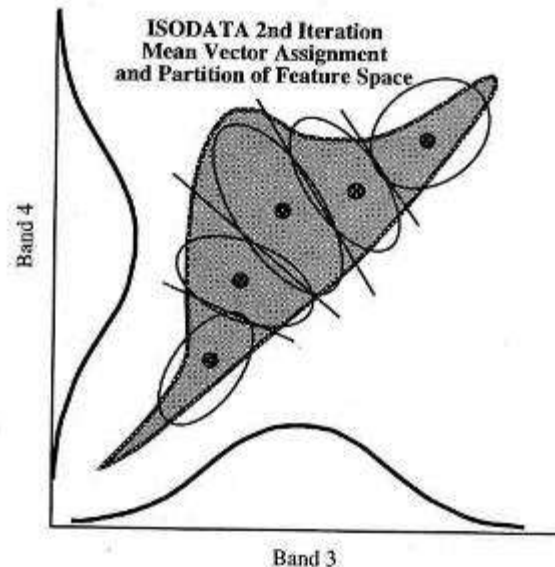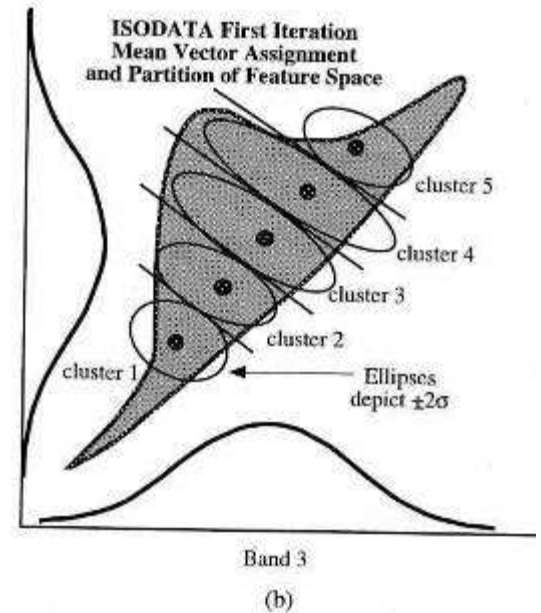
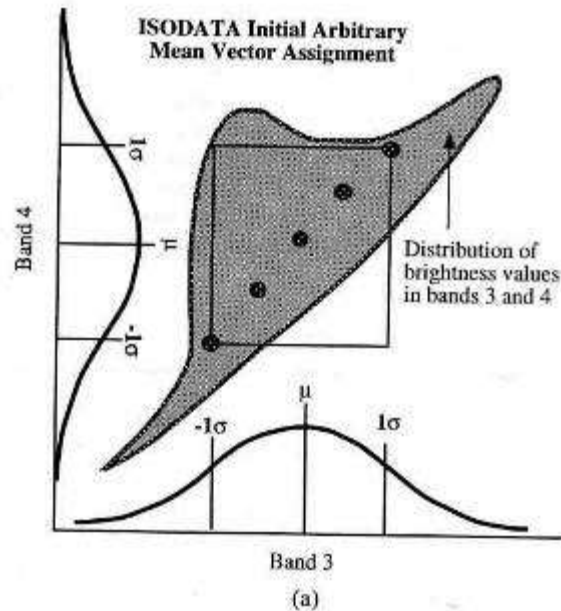


unsupervised classification - algorithms and iterations

1. **K-means** minimises within cluster range of DN's

2. **Fuzzy K-means** enables mixed membership, based on distribution of the cluster

3. **Isodata** can also merge or split clusters, so the number of clusters is more flexible

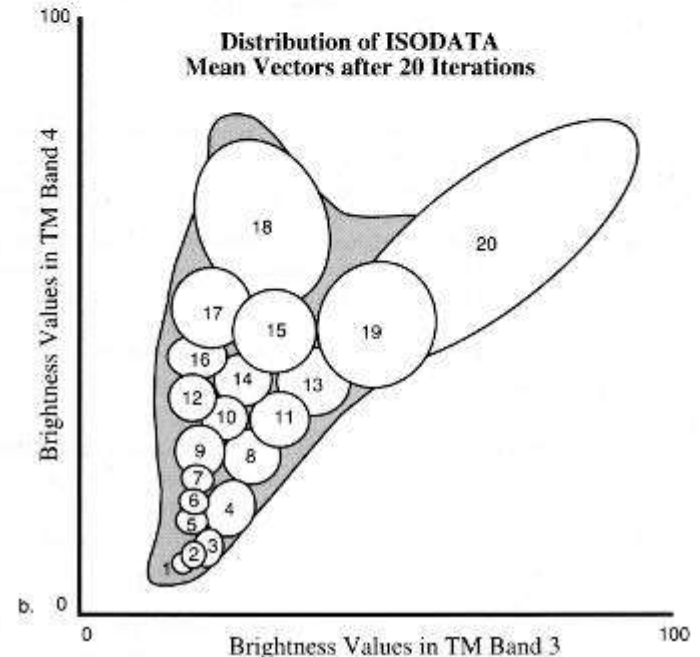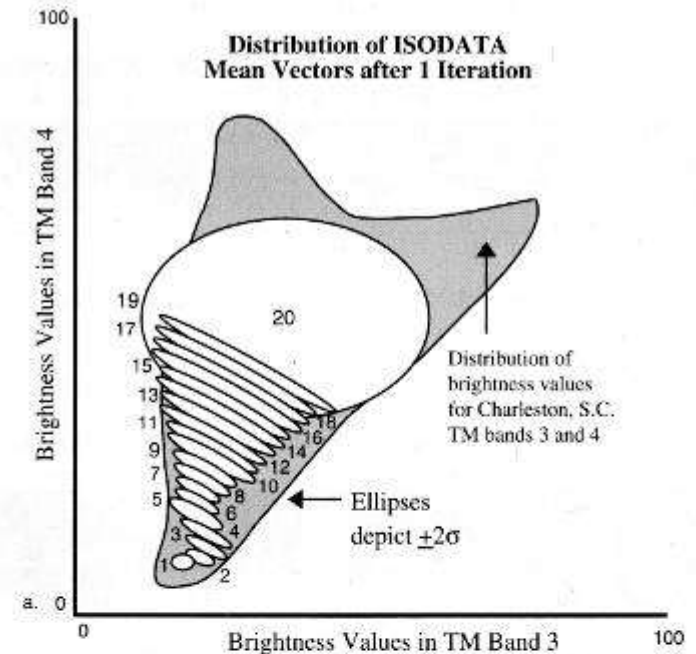


classification report

1 iteration

Note:
clusters with 0 pixels
Clusters with ### pixels

DN values for bands 3,4,5

Final step ..
Assigning
names to
clusters (and
merge some)

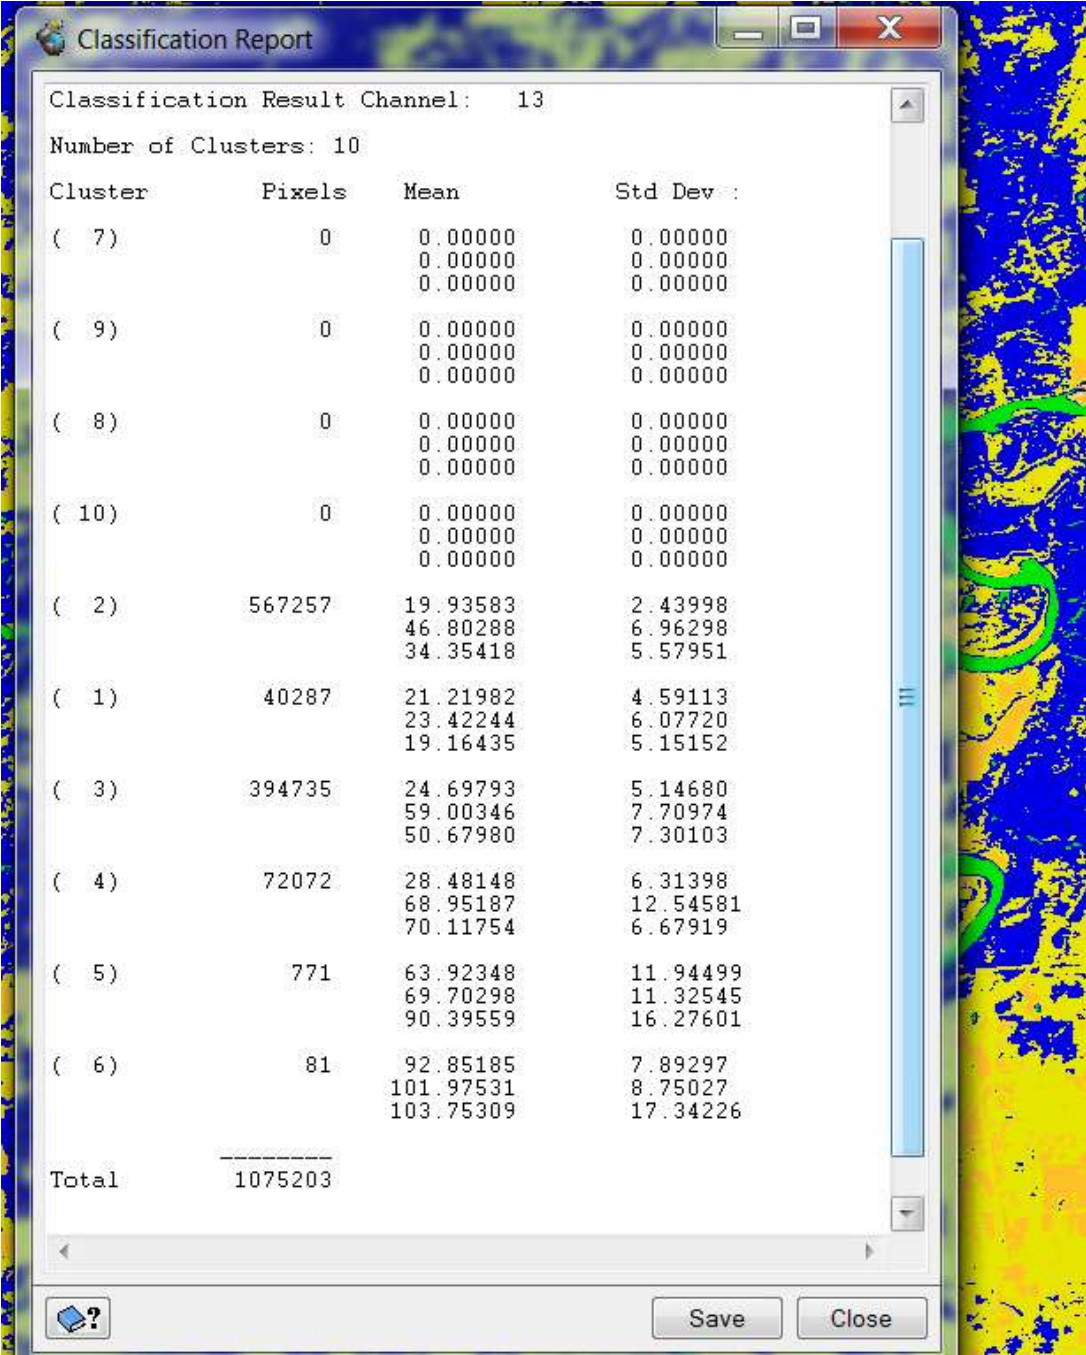

After 16 iterations and 16 classes/clusters

Classification Report			
Classification Algorithm: Fuzzy K-Means Unsupervised			
Classification Input Channels: 3,4,5			
Classification Result Channel: 9			
Number of Clusters: 16			
Cluster	Pixels	Mean	Std Dev :
(2)	296774	23.24140	8.24662
		44.77742	8.91783
		32.44915	10.04080
(3)	292356	24.48324	7.14404
		67.65602	10.67916
		49.51679	9.53926
(4)	155525	24.75149	5.03961
		107.39487	18.20386
		74.22362	13.35878
(1)	135750	42.07941	13.08230
		26.82458	8.12628
		16.47926	11.00162
(5)	151100	42.87475	9.25817
		60.36603	13.13133
		89.47187	18.67191
(7)	86198	84.79987	12.60066
		59.46275	9.37685
		20.03181	14.03484

(8)	85354	122.33620	10.20878
		95.34046	8.68392
		19.40815	16.75611
(9)	79592	151.05591	9.22842
		105.45887	8.13428
		20.59924	20.61743
(10)	60789	175.72850	8.52307
		125.70449	8.00244
		25.36989	25.79001
(11)	55539	201.23238	7.64972
		142.52280	7.16980
		17.82207	16.81002
(12)	54187	225.29511	7.08180
		159.06710	6.45671
		16.18565	13.71707
(13)	56164	247.23974	6.06449
		172.45732	4.56608
		13.11189	7.50873
(14)	113965	254.84619	0.99330
		185.52277	4.41832
		12.44097	4.33174
(15)	51887	254.93781	0.76476
		202.95095	5.59141
		14.38227	7.67388
(16)	33140	254.99879	0.08035
		225.13265	8.29124
		13.28431	3.35810

Fuzzy classification – each pixel has potential membership in more than one cluster

Merging and adding classes


Merging - if clusters are not really separate features; Clusters are merged if they overlap spatially or are similar spectrally.




Splitting / adding

If one cluster covers too much area - run again with more clusters

Can generate many clusters, and then group merge later ...

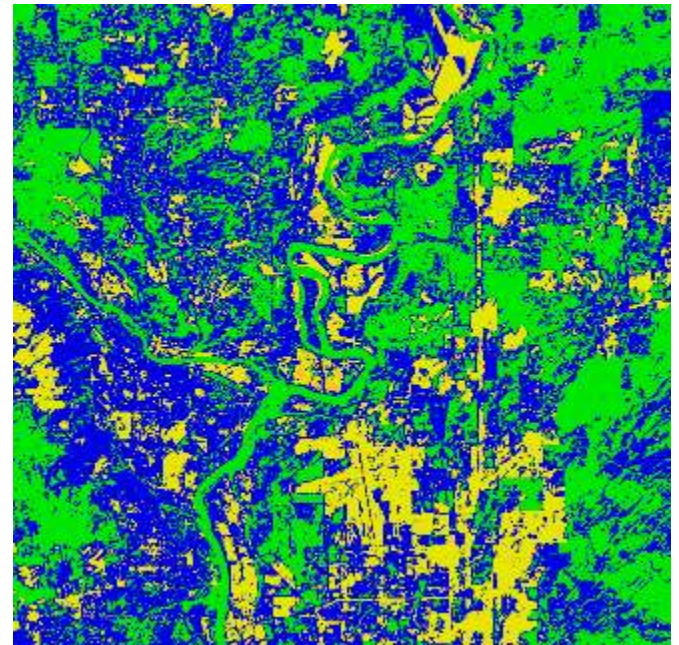

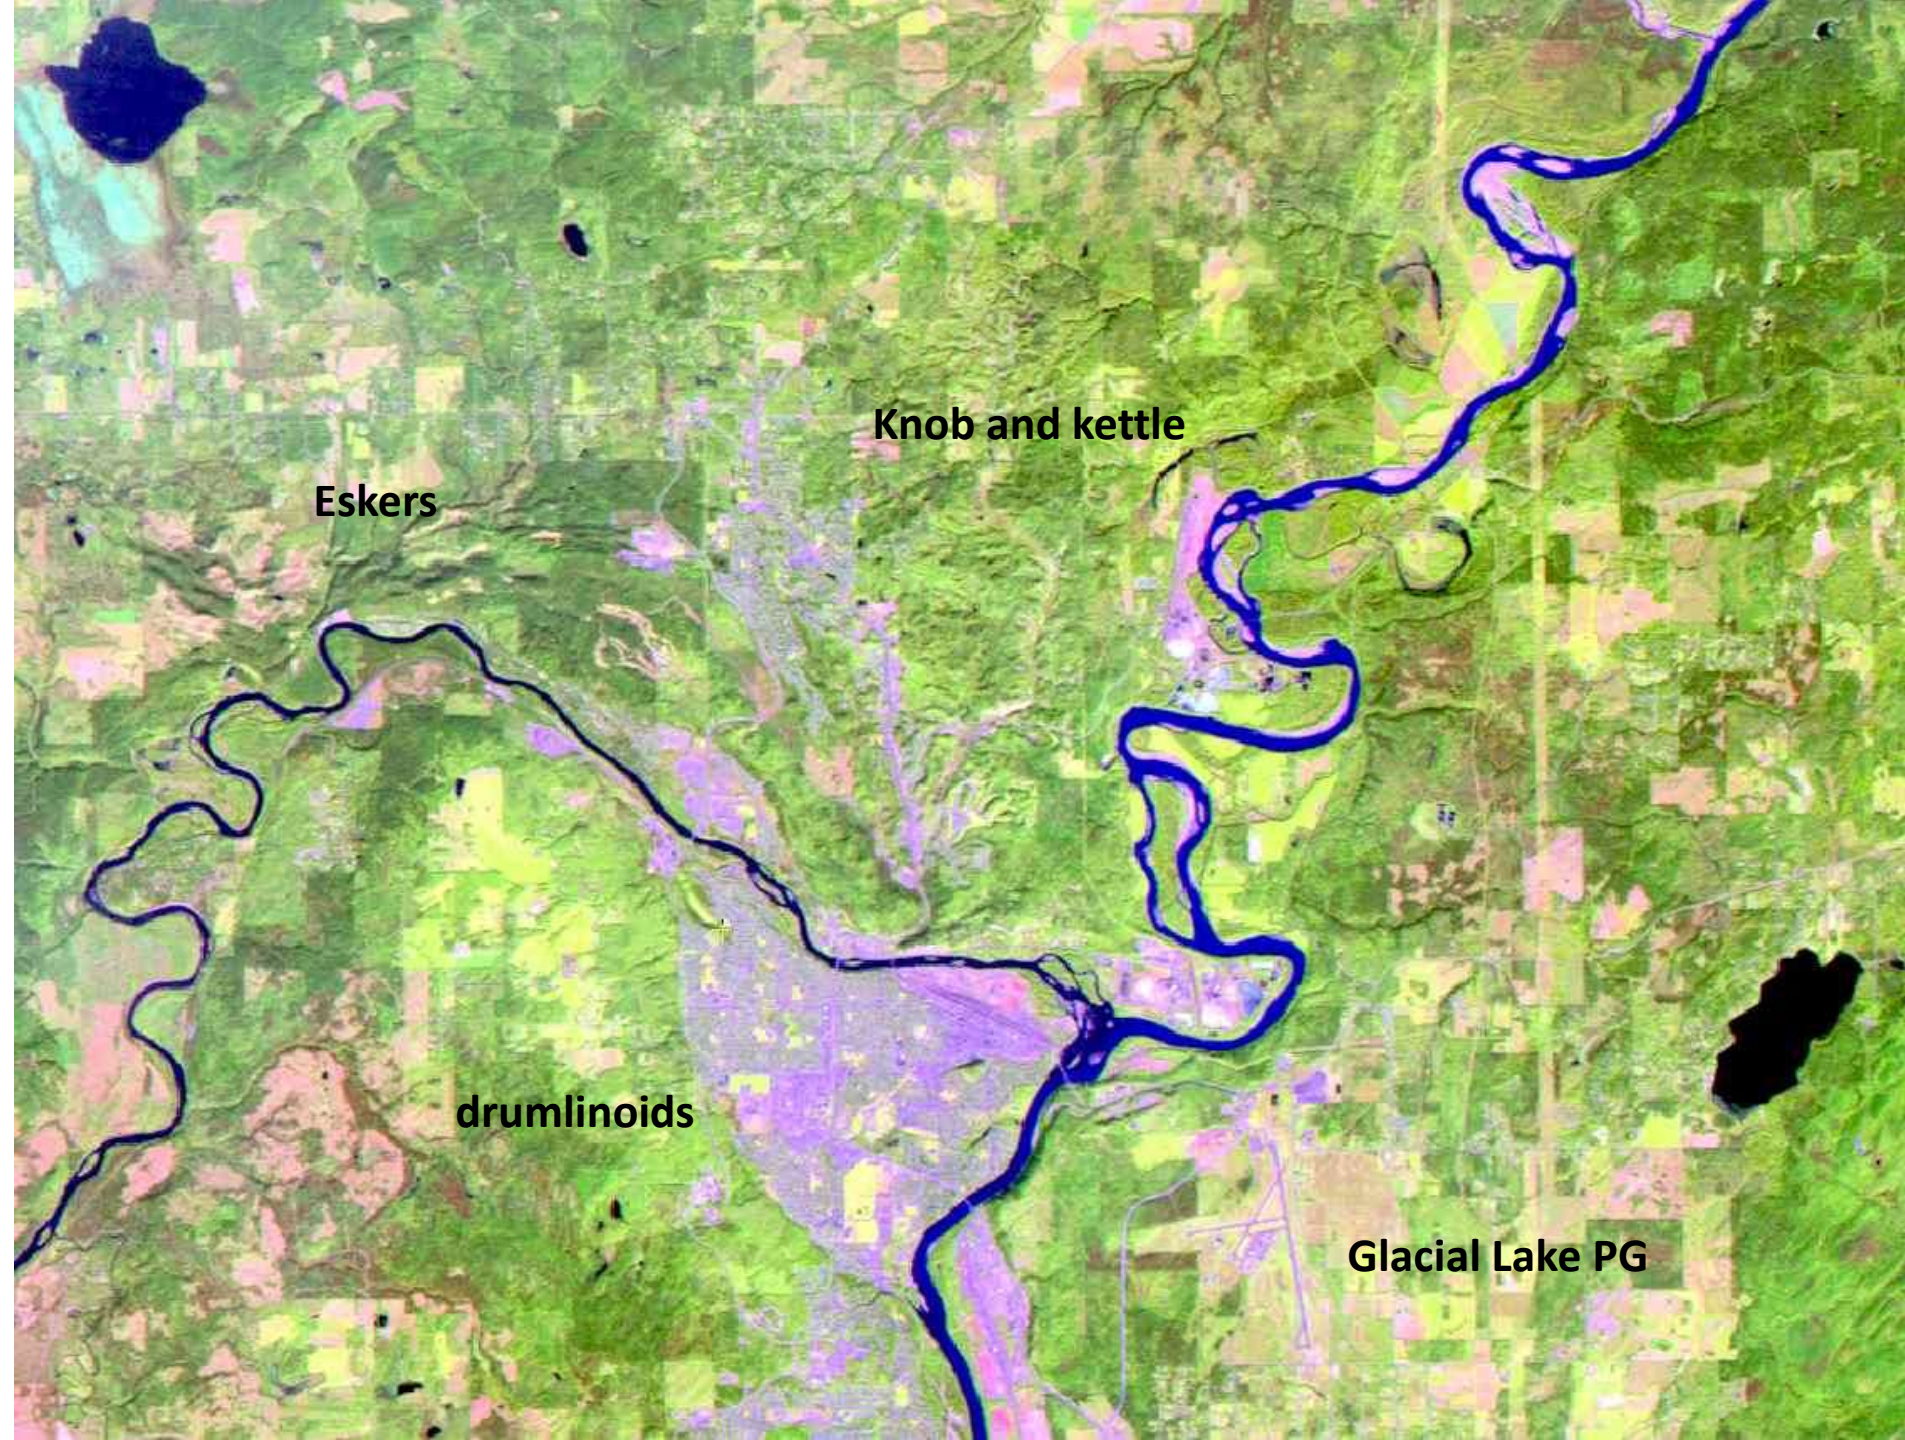

Eskers

Knob and kettle


drumlinoids

Glacial Lake PG

Sieve - filter

Mt. Kilimanjaro

Classification **ALWAYS** produces a 'salt and pepper' effect with isolated pixels
This is a result of a. fine local variations in DNs and b. using '**per-pixel**' classifiers

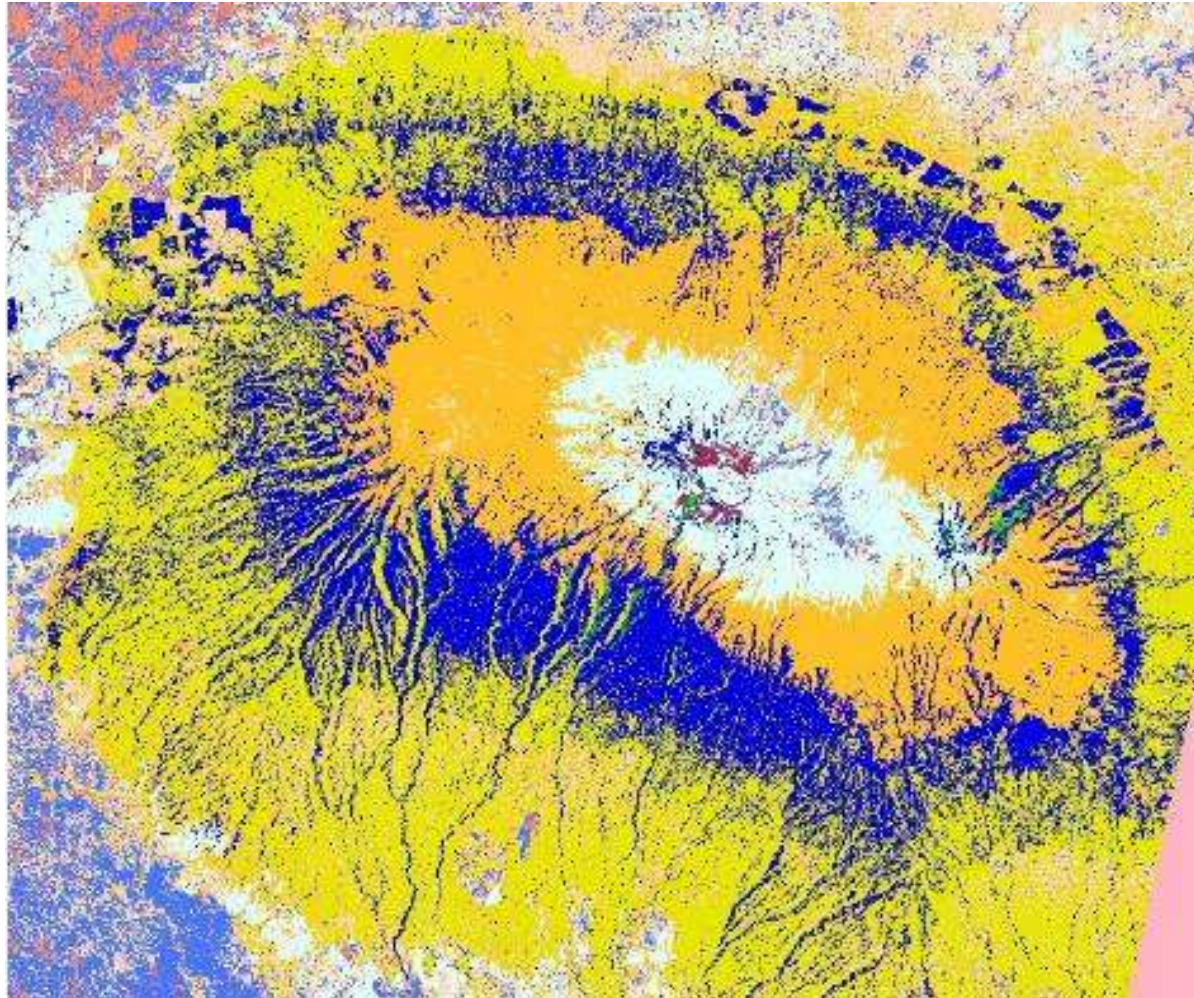

Minimum desirable cluster / GIS polygon – 1 ha ? ... ~ 11 pixels ?

Challenges in classification - why it doesn't always beat digitising

There are many spatial variations in reflectance (a range of DNs for a feature)
e.g. stand purity, understory, age/maturity, density, disease, sun angle, topography



Classes/clusters: water, bare rock, glaciers, deciduous, coniferous, shadow?, cutblocks, planted..

There are many causes of spatial variations in reflectance (a range of DNs for a feature)

URBAN / HUMAN - mosaic of smaller features inside a 30 metre pixel

- amount of grass, types of material, roofing colour, weathering, sun angle (building shape)



Overall summary on classification

It is always complex - the classes and their contrasts
There are many causes of spatial variations in reflectance
Most (natural) features are continuous, not discrete

Using only DNs:

Any land cover types have a range of values
Conversely, different cover types can look similar

Further complications for all images:

- a. moisture (recent events)
- b. edge (mixed) pixels
- c. sun angle (illumination)

Textbook classification goal: ~ 85% accuracy
Even manual digitizing may not do any better